

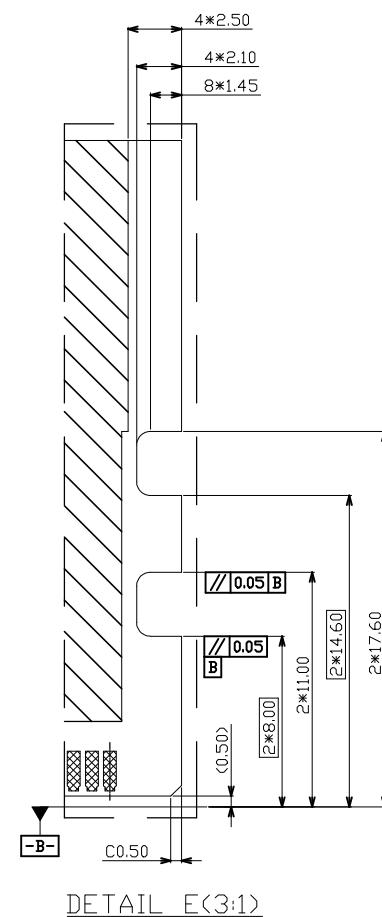
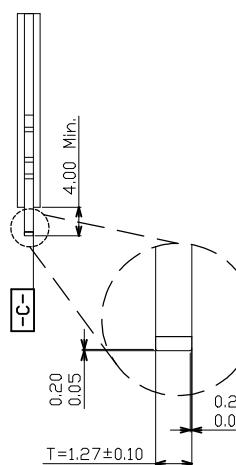
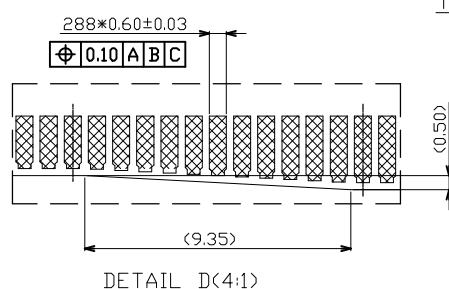
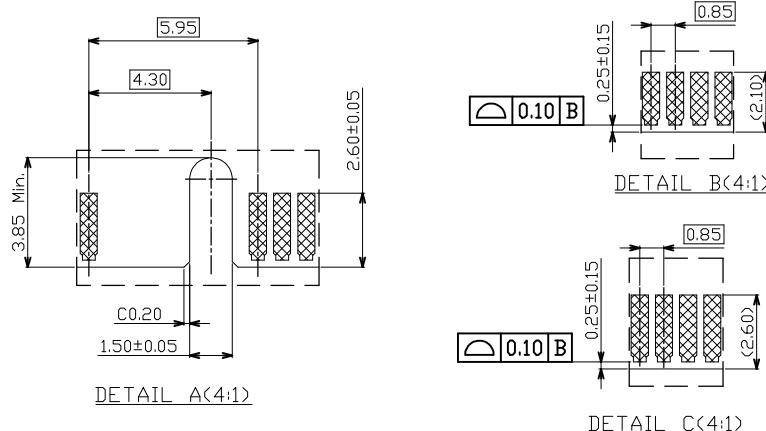
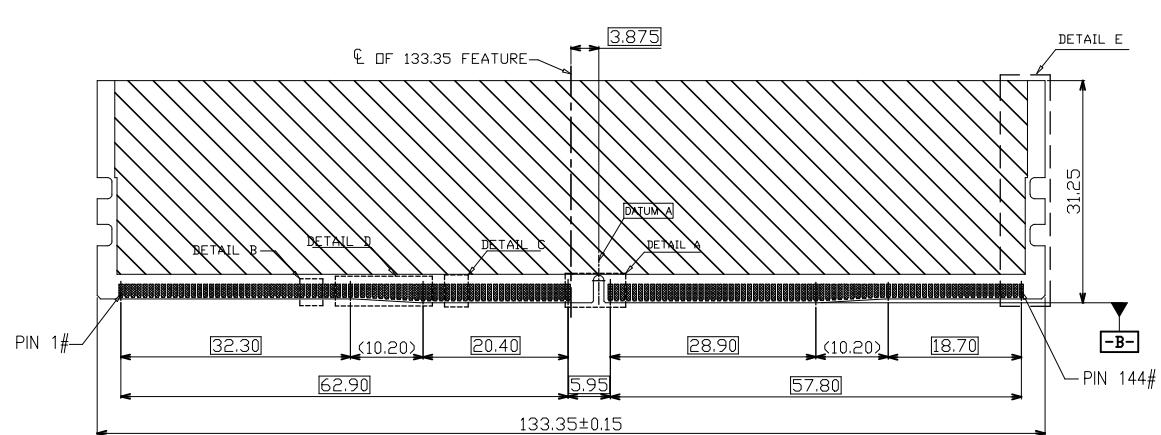


1	2	3	4	5	6	7	8																																																
REV	LTR	DESCRIPTION			DATE	DWN																																																	
<p>NOTES:</p> <ol style="list-style-type: none"> MATERIAL: <ul style="list-style-type: none"> 1) HOUSING: HIGH TEMPERATURE THERMOPLASTIC, BLACK, UL94 V-0; 2) EJECTOR: HIGH TEMPERATURE THERMOPLASTIC, BLACK, UL94 V-0; 3) CONTACT: COPPER ALLOY; FINISH: <ul style="list-style-type: none"> a) 30μ MIN NI UNDER PLATED ALL; b) Au PLATING ON CONTACT AREA; c) MATTE-Tin 80μ MIN. ON SOLDER AREA; 4) Latch: SPCC, Ni Plated. MECHANICAL: <ul style="list-style-type: none"> a) INSERTION FORCE-MODULE TO CONNECTOR: 106.8N MAX; b) Umoating FORCE: 19.77N Min; c) DURABILITY: 25 CYCLES. ELECTRICAL PERFORMANCE: <ul style="list-style-type: none"> a) VOLTAGE RATING: 1.1V ±0.1V; b) CURRENT RATING: 1.0A PER PIN MAX; c) LLCR: 40mΩ MAX.(INITIAL), ΔR: 20mΩ MAX; d) INSULATION RESISTANCE: 500V DC, 1MΩ MIN.; e) DIELECTRIC WITHSTANDING VOLTAGE: APPLY 500V AC, NO BREAKDOWN. Operating Temperature: -55°C to +85°C; ALL MATERIAL SHOULD BE FULFILLED ROHS COMPLIANT. 																																																							
<p>*ORDER INFORMATION:*</p> <p>EAST-288 15 X 07 XX X X</p> <p>No. of Pins</p> <p>Environment Protection:</p> <p>R for RoHS G for GP H for Halogen-free</p> <p>Packing:</p> <p>C-Tray</p> <p>HSG Color:</p> <p>Kit Block</p>																																																							
<p>SECTION A-A (2:1)</p> <p>DETAIL A(5:1)</p> <p>DETAIL B(5:1)</p> <p>Module Card Slot=1.45</p> <p>GAP=0.95±0.15</p> <p>1.40±0.05</p> <p>1.40±0.05</p> <p>2.00±0.30</p> <p>3.90</p> <p>5.20</p> <p>2.0 Max</p> <p>288*0.28±0.05</p> <p>6*0.44</p> <p>6*0.45</p> <p>3.65</p> <p>2.00±0.30</p> <p>5.20</p> <p>2.0 Max</p>				<table border="1"> <thead> <tr> <th colspan="2">TOLERANCE</th> <th colspan="2">Suzhou CHNEAST Technology Co.,Ltd</th> <th colspan="4">TITLE: R-DIMM DDR5 288P SMT TYPE</th> </tr> <tr> <th>LINEAR</th> <th>ANGLES</th> <th colspan="2">ShenZhen CHNEAST Technology Co.,Ltd</th> <th colspan="4">CUSTOMER PART NO.: SEE TABLE</th> </tr> </thead> <tbody> <tr> <td>X.±0.50</td> <td>X.±2.0°</td> <td colspan="2"></td> <td colspan="4">COPY DWG NO.: EAST-28815-07</td> </tr> <tr> <td>X.±0.38</td> <td>X.±1.0°</td> <td colspan="2"></td> <td colspan="4"></td> </tr> <tr> <td>.XX ±0.25</td> <td>XX±</td> <td>APPD:</td> <td>DRWN:</td> <td>Rocky</td> <td>UNITS</td> <td>SCALE</td> <td>HEET</td> </tr> <tr> <td>.XXX ±0.15</td> <td>XXX±</td> <td>CHKD:</td> <td>DATE:</td> <td>2021-6-22</td> <td>MM</td> <td>1:1</td> <td>1 OF 3 A/0</td> </tr> </tbody> </table>				TOLERANCE		Suzhou CHNEAST Technology Co.,Ltd		TITLE: R-DIMM DDR5 288P SMT TYPE				LINEAR	ANGLES	ShenZhen CHNEAST Technology Co.,Ltd		CUSTOMER PART NO.: SEE TABLE				X.±0.50	X.±2.0°			COPY DWG NO.: EAST-28815-07				X.±0.38	X.±1.0°							.XX ±0.25	XX±	APPD:	DRWN:	Rocky	UNITS	SCALE	HEET	.XXX ±0.15	XXX±	CHKD:	DATE:	2021-6-22	MM	1:1	1 OF 3 A/0
TOLERANCE		Suzhou CHNEAST Technology Co.,Ltd		TITLE: R-DIMM DDR5 288P SMT TYPE																																																			
LINEAR	ANGLES	ShenZhen CHNEAST Technology Co.,Ltd		CUSTOMER PART NO.: SEE TABLE																																																			
X.±0.50	X.±2.0°			COPY DWG NO.: EAST-28815-07																																																			
X.±0.38	X.±1.0°																																																						
.XX ±0.25	XX±	APPD:	DRWN:	Rocky	UNITS	SCALE	HEET																																																
.XXX ±0.15	XXX±	CHKD:	DATE:	2021-6-22	MM	1:1	1 OF 3 A/0																																																

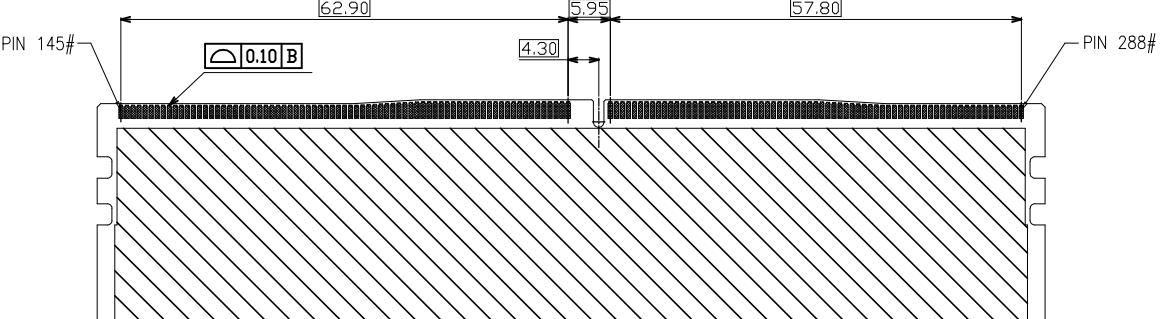

TOLERANCE		深圳市东方御业科技有限公司		TITLE: R-DIMM DDR5 288P SMT TYPE	
LINEAR	ANGLES	ShenZhen CHNEAST Technology co.,Ltd		PART NO.: SEE TABLE	
X.±0.50	X.±2.0°				
X.±0.38	X.±1.0°				
.XX ±0.25	.XX*±	APPD:	DRWN:	Rocky	
.XXX ±0.15	.XXX*±	CHKD:	DATE:	2021-6-22	
		UNITS	SCALE	HEET	REV
		MM	1:1	2 OF 3	A/0

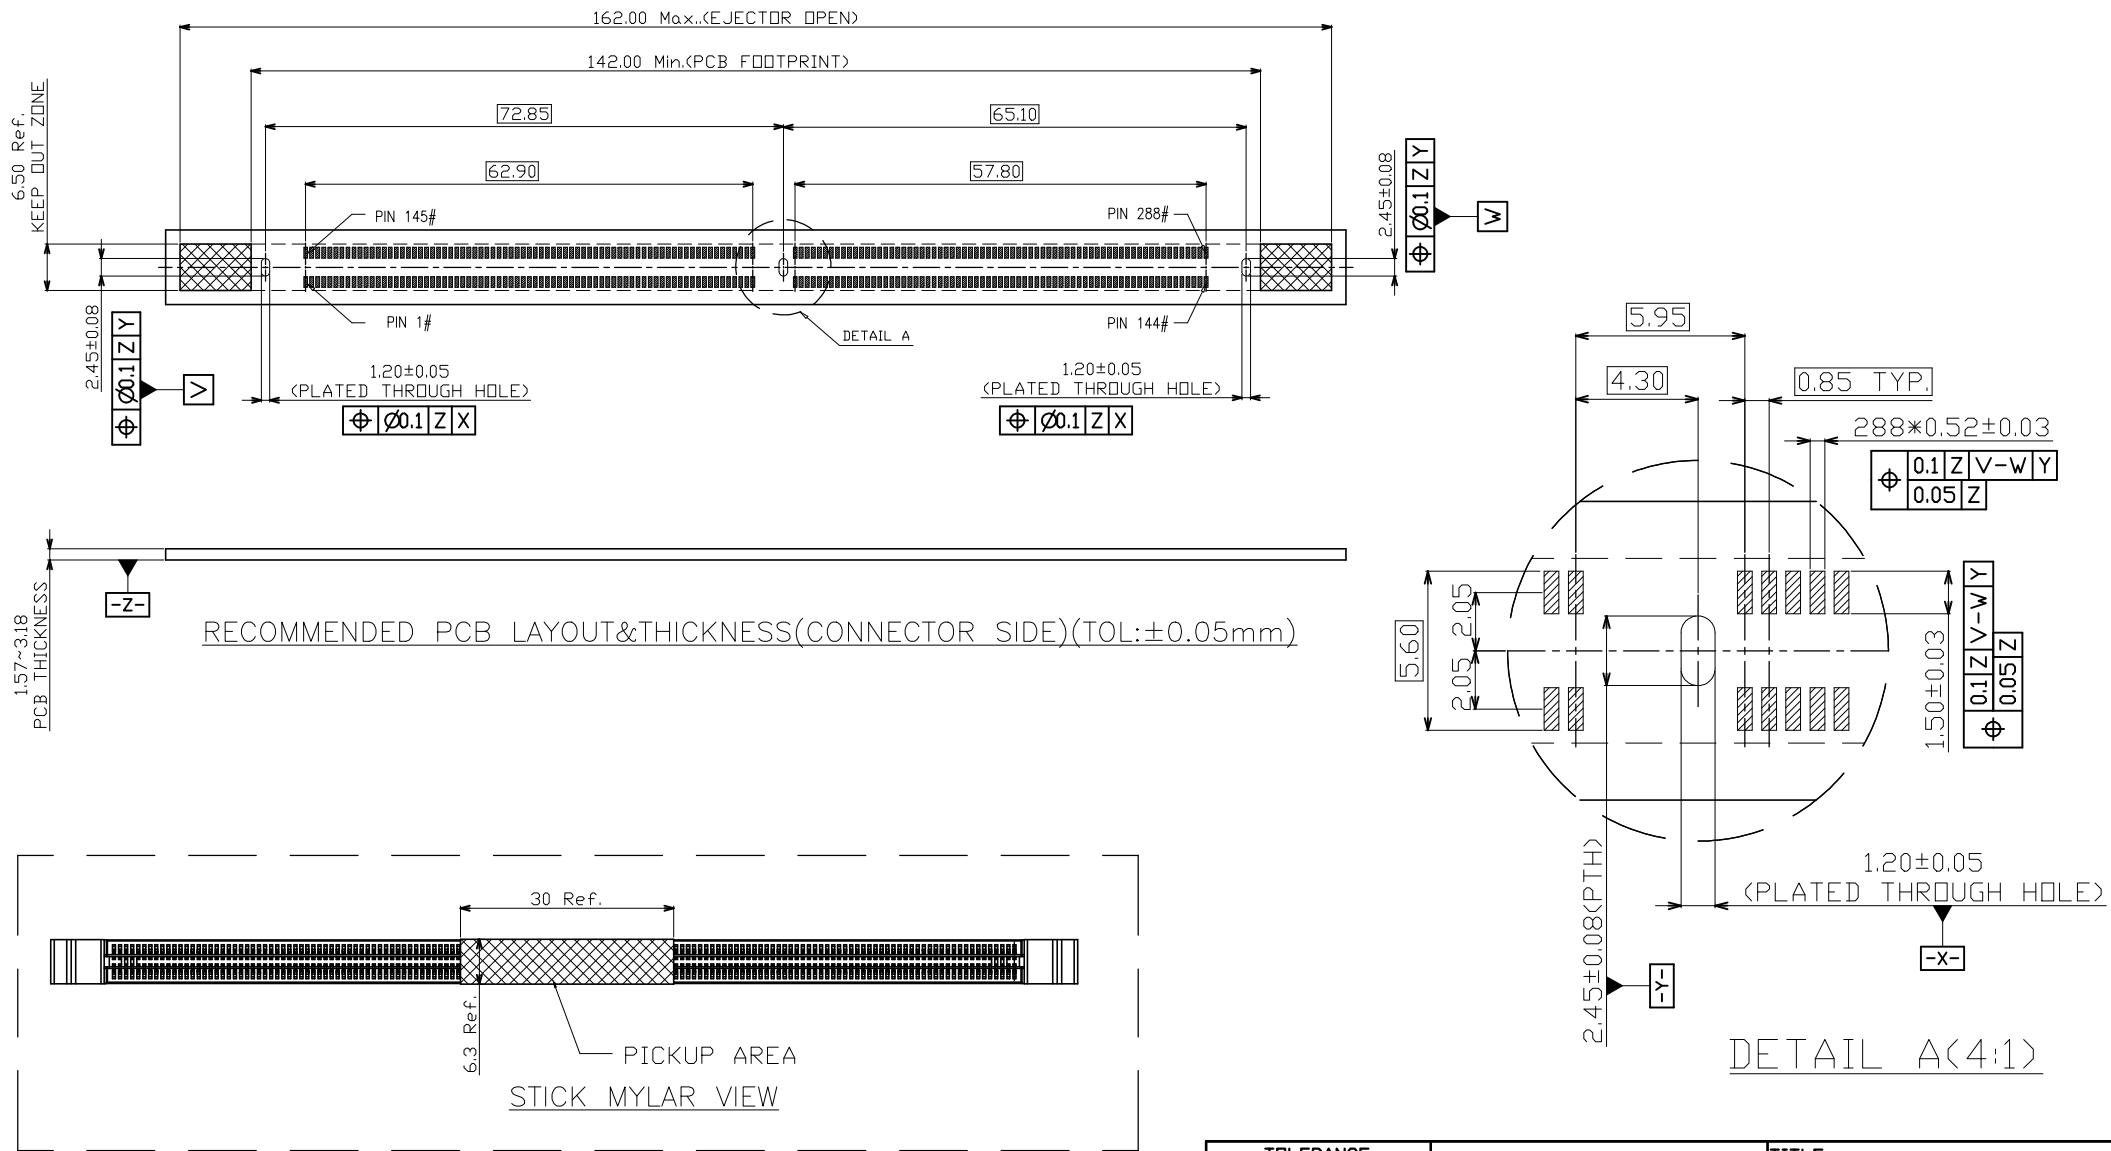

TOLERANCE		深圳市东方御业科技有限公司		TITLE: R-DIMM DDR5 288P SMT TYPE	
LINEAR	ANGLES	ShenZhen CHNEAST Technology co.,Ltd		CUSTOMER PART NO.: SEE TABLE	
X.±0.50	X*±2.0°			CUSTOMER	PART NO.: SEE TABLE
.X ±0.38	.X*±1.0°			COPY	DWG NO.: EAST-28815-07
.XX ±0.25	.XX*±	APPD:	DRWN:	UNITS	SCALE
.XXX ±0.15	.XXX*±	CHKD:	Rocky	MM	1:1
			DATE: 2021-6-22	2 D/F	3 A/0